


# Specifications

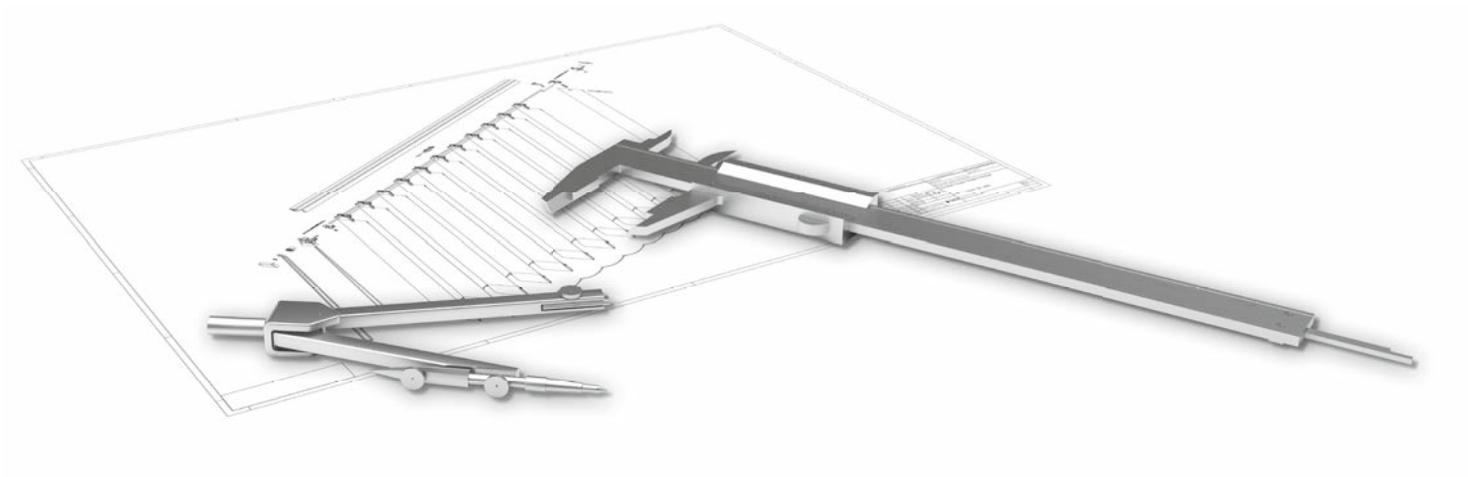


Specifica-  
tions




# Standard blinds

Model **05-7827** (127 mm) and model **05-7889** (89 mm)


## Technical information

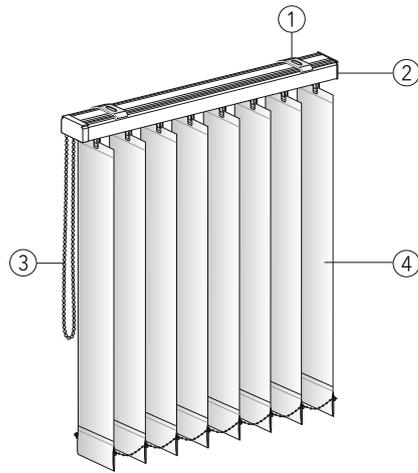

- ① Clip
- ② Head rail
- ③ Operating chain with safety breaking system
- ④ Blind fabric
- ⑤ Weighting plate with intake for slat chain
- ⑥ Slat chain
- ⑦ Weighting plate welded in
- ⑧ Weighting plate for pushing in

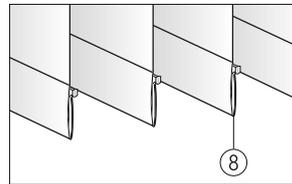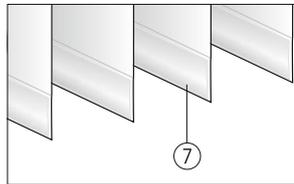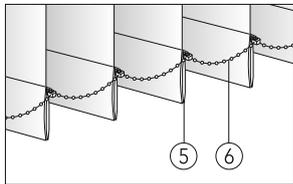


## Technical data (Scale 1:2)

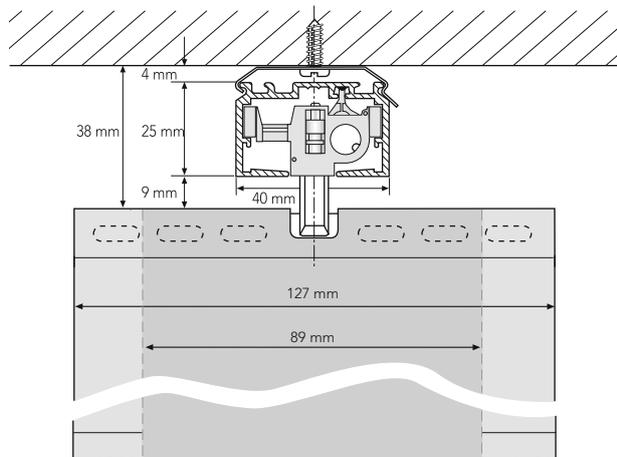


## Non-linked blinds - Parking positions

2-piece blind, bundles left and right

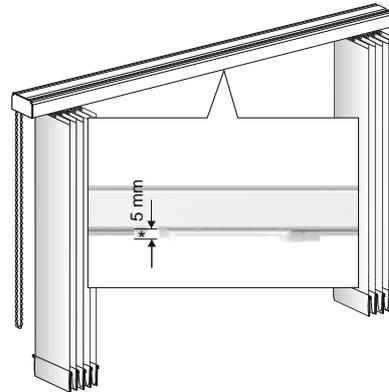

\* The profile height increases by 5 mm.

2-piece blind, bundles central

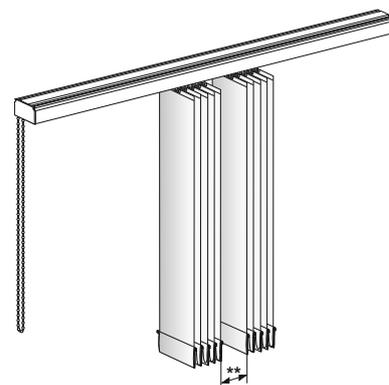

\*\* Light gap in the case of slats with

127 mm: 11 cm  
89 mm: 7.5 cm



# Standard blinds

Model **05-7827** (127 mm) and model **05-7889** (89 mm)

## Technical information

---

Slatted blind: See MHZ collection, 127 or 89 mm wide, slats made of woven fabric, plastic or aluminium.  
Information regarding special properties: For suitability for computer workstations, fire-resistance etc., see collection and textile notes.

Slat termination:	Textile slats	Plastic slats	Aluminium slats
Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain
on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected

Installation: Visible mounting clip  
Optional: Covered mounting clip, not visible thanks to additional grooves in the rail.  
For fitting safety tensioner see page 95.

Accessories: Not included: Wall bracket, special mounting clip, mounting bar for suspended ceilings


Child safety: Please see the note on page 95.



# Classic blinds


Model **05-7227** (127 mm), model **05-7289** (89 mm) and model **05-7025** (250 mm)

## Technical information

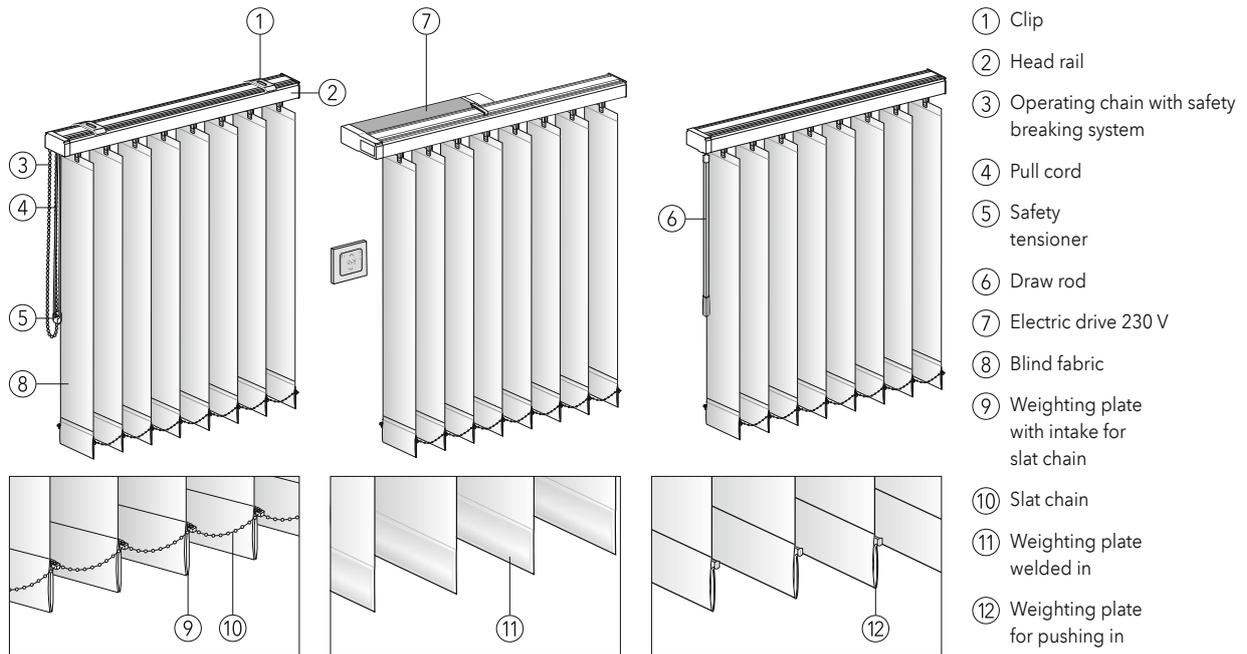


Not applicable to model **05-7025**

## Technical data (Scale 1:2)

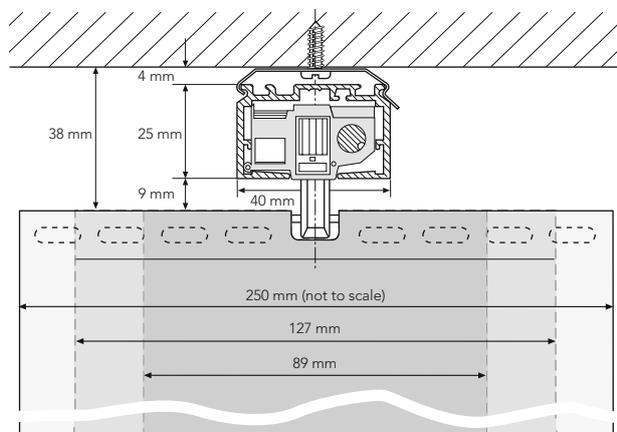


## Non-linked blinds - Parking positions

2-piece blind, bundles left and right

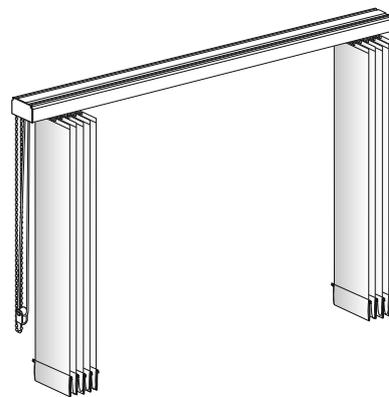

2-piece blind, bundles central

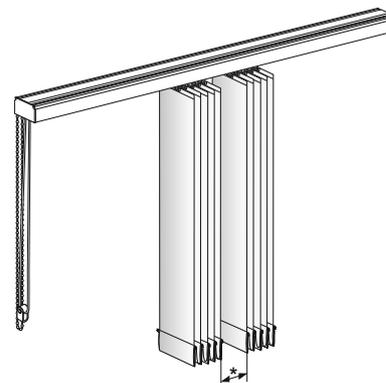

\* Light gap for slats with

127 mm: 11 cm  
 89 mm: 7.5 cm  
 250 mm: 22 cm

# Classic blinds

Model **05-7227** (127 mm), model **05-7289** (89 mm) and model **05-7025** (250 mm)

## Specifications


Model:	<b>05-7227</b> 127 mm <b>05-7289</b> 89 mm <b>05-7025</b> 250 mm																								
Operation options:	- Cord / operating chain - Draw rod - Electric drive 230 V - RTS electric radio drive 230 V																								
Description:	Vertical blinds with vertical slats in widths of 127, 89 or 250 mm. Light regulation by turning the slats and by opening and closing the blind by moving the slats. Operation optionally on left or right. Blind bundles 1-piece left or right, several pieces (not with draw rod operation) left and right or central.																								
Operation:	Cord/chain: Opening and closing of the blind by pull cord, turning of the slats by transparent plastic chain with safety breaking system (included as standard) On request: transparent operating chain without safety breaking system, with safety tensioner Metal operating chain with safety tensioner (surcharge applies) Draw rod: Blind opened and closed and slats turned using a draw rod Electric drive 230 V: Blind opened and closed and slats turned (only with blind completely closed) by means of 230V electric drive. Various control options, with relevant actuators suitable for Bus systems.																								
Dimensions:	<table border="1"> <thead> <tr> <th rowspan="2">Operation / Function</th> <th colspan="4">Unit sizes</th> </tr> <tr> <th>Min. width</th> <th>Max. width</th> <th>Max. height</th> <th>Max. blind fabric weight</th> </tr> </thead> <tbody> <tr> <td>Cord/chain</td> <td>20 cm and above</td> <td>695 cm</td> <td>350 cm</td> <td>20 kg</td> </tr> <tr> <td>Draw rod</td> <td>20 cm and above</td> <td>695 cm</td> <td>300 cm</td> <td>6 kg</td> </tr> <tr> <td>Electric drive 230 V / RTS electric radio drive 230 V</td> <td>40 cm and above</td> <td>695 cm</td> <td>350 cm</td> <td>22 kg</td> </tr> </tbody> </table>	Operation / Function	Unit sizes				Min. width	Max. width	Max. height	Max. blind fabric weight	Cord/chain	20 cm and above	695 cm	350 cm	20 kg	Draw rod	20 cm and above	695 cm	300 cm	6 kg	Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	695 cm	350 cm	22 kg
Operation / Function	Unit sizes																								
	Min. width	Max. width	Max. height	Max. blind fabric weight																					
Cord/chain	20 cm and above	695 cm	350 cm	20 kg																					
Draw rod	20 cm and above	695 cm	300 cm	6 kg																					
Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	695 cm	350 cm	22 kg																					
Head rail:	Made of extruded aluminium (AlMgSi 0.5 F22), width 40 mm, height 25 mm. Standard colours: <b>100</b> silver anodised E6/EV1 <b>385</b> window grey matt textured RAL 7040 <b>171</b> white RAL 9016 <b>650</b> anthracite, similar to DB 703 <b>172</b> white matt textured RAL 9016 <b>671</b> black matt textured RAL 9005 RAL colours on request																								
Turning rod:	Made of extruded aluminium (AlMgSi 0,5 F25), torsion-resistant slotted rod Ø 6 mm, stabilisation by means of stationary rod supports																								
Slat travellers:	Made of wear-resistant plastic with prelubricated castors, gear for 180° slat tilting, safety clutch for even slat alignment and to prevent any over-rotation of the gears. Individually made stainless steel spacers for even overlapping of slats. 250 mm slat: double the number of slat travellers for increased functional reliability.																								
Slat hook:	Made of transparent plastic, renewable																								
Slatted blind:	See MHZ collection, 127, 89 or 250 mm wide, slats made of woven fabric, plastic or aluminium. Information regarding special properties: For suitability for computer workstations, fire resistance etc., see collection, textile notes.																								
Slat termination:	<table border="1"> <thead> <tr> <th></th> <th>Textile slats</th> <th>Plastic slats</th> <th>Aluminium slats</th> </tr> </thead> <tbody> <tr> <td>Standard items included</td> <td>- weighting plate with plastic slat chain</td> <td>- free-hanging, not connected</td> <td>- connected in centre by a metal slat chain</td> </tr> <tr> <td>on request</td> <td>- weighting plate, welded in (no surcharge) - weighting plate for pushing in, no slat chain (standard with type 05-7025) - weighting plate with metal slat chain (surcharge applies)</td> <td></td> <td>- free-hanging, not connected</td> </tr> </tbody> </table>		Textile slats	Plastic slats	Aluminium slats	Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain	on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in, no slat chain (standard with type 05-7025) - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected												
	Textile slats	Plastic slats	Aluminium slats																						
Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain																						
on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in, no slat chain (standard with type 05-7025) - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected																						
Installation:	Visible mounting clip Optional: Covered mounting clip, not visible thanks to additional grooves in the rail. For fitting safety tensioner see page 95.																								
Accessories:	Safety tensioner for cord. Not included: Wall bracket, special mounting clip, mounting bar for suspended ceilings																								
Child safety:	Please see the note on page 95.																								

Specifica-  
tions


# Classic slope blinds

Model **05-7229** (127 mm) and model **05-7258** (89 mm)


## Technical information

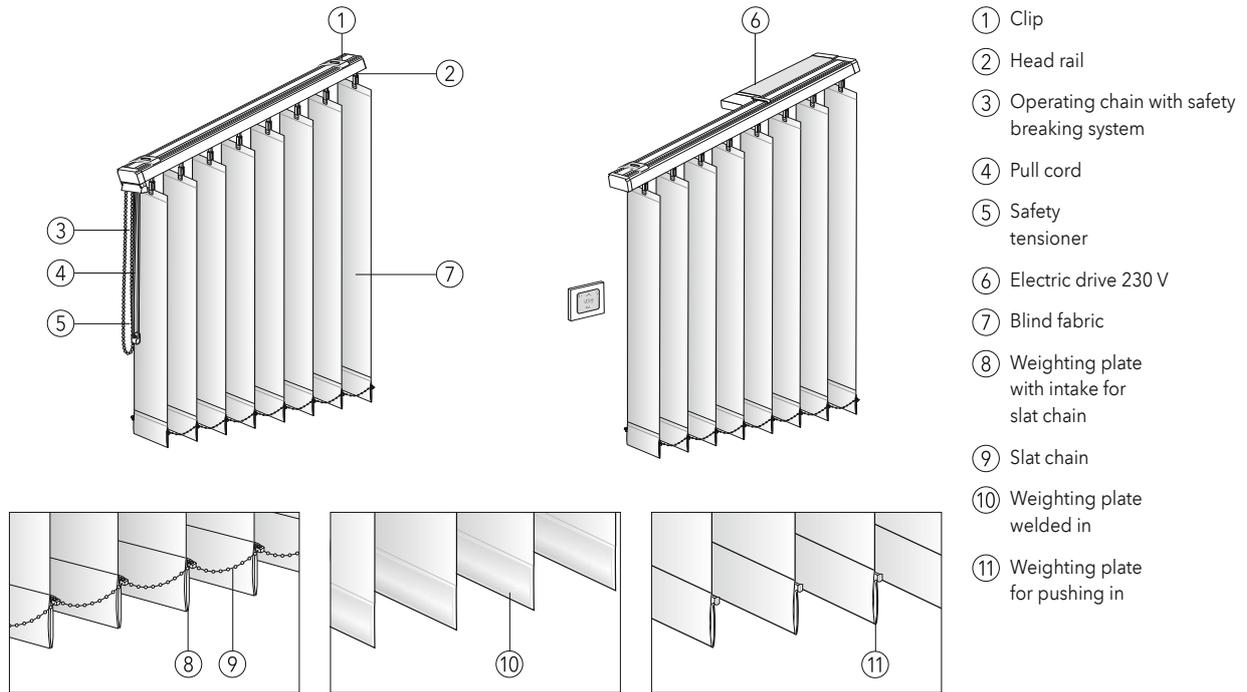

## Technical data (Scale 1:2)

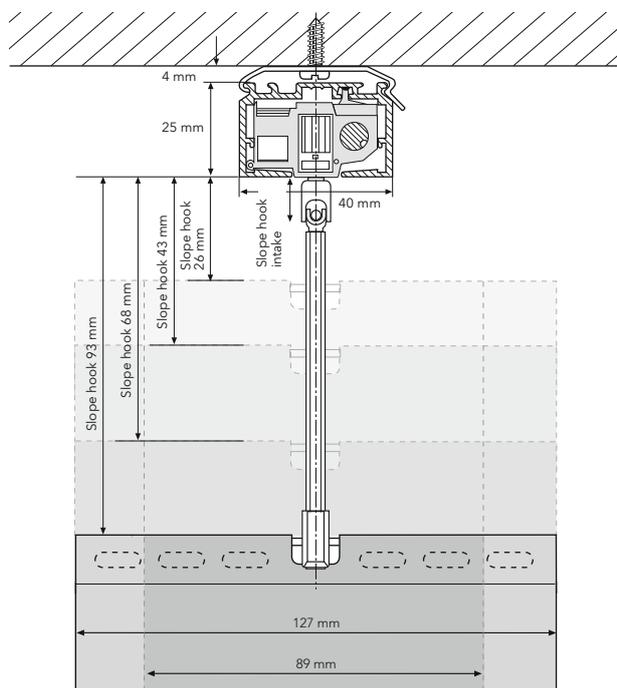

## Variants

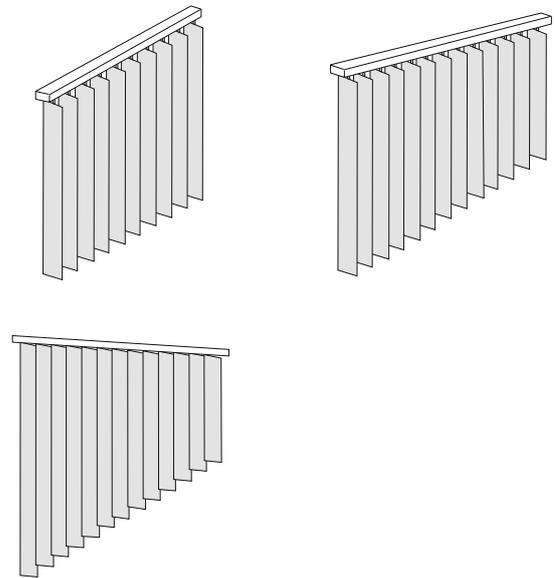

Prices on request

# Classic slope blinds

Model **05-7229** (127 mm) and model **05-7258** (89 mm)

## Specifications


Model:	<b>05-7229</b> 127 mm <b>05-7258</b> 89 mm																		
Operation options:	- Cord / operating chain - Electric drive 230 V - RTS electric radio drive 230 V																		
Description:	Slope vertical blinds with vertical slats in widths of 127 or 89 mm. Light regulation by turning the slats and by opening and closing the blind by moving the slats. Operation optionally on left or right. Blind bundle one-piece, top. Optional: Blind bundle, bottom.																		
Operation:	Cord/chain: Opening and closing of the blind by pull cord, turning of the slats by transparent plastic chain with safety breaking system (included as standard) On request: transparent operating chain without safety breaking system, with safety tensioner Metal operating chain with safety tensioner (surcharge applies) Electric drive 230 V: Opening and closing of the blind and turning of the slats (only with blind completely closed) by electric drive 230 V (the electric drive can be positioned only on the side with the greater height). Various control options, with relevant actuators suitable for Bus systems.																		
Dimensions:	<table border="1"> <thead> <tr> <th rowspan="2">Operation / Function</th> <th colspan="3">Unit sizes</th> <th rowspan="2">Max. blind fabric weight (angle-dependent)</th> </tr> <tr> <th>Min. width</th> <th>Max. width</th> <th>Max. height</th> </tr> </thead> <tbody> <tr> <td>Cord/chain</td> <td>20 cm and above</td> <td>up to 695 cm</td> <td>350 cm</td> <td>5-20 kg</td> </tr> <tr> <td>Electric drive 230 V / RTS electric radio drive 230 V</td> <td>40 cm and above</td> <td>up to 695 cm</td> <td>350 cm</td> <td>5-22 kg</td> </tr> </tbody> </table>	Operation / Function	Unit sizes			Max. blind fabric weight (angle-dependent)	Min. width	Max. width	Max. height	Cord/chain	20 cm and above	up to 695 cm	350 cm	5-20 kg	Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	up to 695 cm	350 cm	5-22 kg
Operation / Function	Unit sizes			Max. blind fabric weight (angle-dependent)															
	Min. width	Max. width	Max. height																
Cord/chain	20 cm and above	up to 695 cm	350 cm	5-20 kg															
Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	up to 695 cm	350 cm	5-22 kg															
Pitch / max. area:	<table border="1"> <thead> <tr> <th>10 - 15 degrees</th> <th>15 - 25 degrees</th> <th>25 - 32 degrees</th> <th>32 - 38 degrees</th> <th>38 - 46 degrees</th> <th>46 - 50 degrees</th> <th>50 - 55 degrees</th> </tr> </thead> <tbody> <tr> <td>20 m<sup>2</sup></td> <td>11 m<sup>2</sup></td> <td>8.0 m<sup>2</sup></td> <td>5.8 m<sup>2</sup></td> <td>3.8 m<sup>2</sup></td> <td>2.7 m<sup>2</sup></td> <td>1.6 m<sup>2</sup></td> </tr> </tbody> </table>	10 - 15 degrees	15 - 25 degrees	25 - 32 degrees	32 - 38 degrees	38 - 46 degrees	46 - 50 degrees	50 - 55 degrees	20 m <sup>2</sup>	11 m <sup>2</sup>	8.0 m <sup>2</sup>	5.8 m <sup>2</sup>	3.8 m <sup>2</sup>	2.7 m <sup>2</sup>	1.6 m <sup>2</sup>				
10 - 15 degrees	15 - 25 degrees	25 - 32 degrees	32 - 38 degrees	38 - 46 degrees	46 - 50 degrees	50 - 55 degrees													
20 m <sup>2</sup>	11 m <sup>2</sup>	8.0 m <sup>2</sup>	5.8 m <sup>2</sup>	3.8 m <sup>2</sup>	2.7 m <sup>2</sup>	1.6 m <sup>2</sup>													
Head rail:	Made of extruded aluminium (AlMgSi 0.5 F22), width 40 mm, height 25 mm. Standard colours: <b>100</b> silver anodised E6/EV1 <b>385</b> window grey matt textured RAL 7040 <b>171</b> white RAL 9016 <b>650</b> anthracite, similar to DB 703 <b>172</b> white matt textured RAL 9016 <b>671</b> black matt textured RAL 9005 RAL colours on request																		
Turning rod:	Extruded aluminium (AlMgSi 0,5 F25), torsion-resistant slotted rod Ø 6 mm, stabilisation by means of stationary rod supports																		
Slat travellers:	Made of wear-resistant plastic with prelubricated castors, gear for 180° slat tilting, safety clutch for even slat alignment and to prevent any over-rotation of the gears. Individually made stainless steel spacers for even overlapping of slats.																		
Slat hook:	Made of transparent plastic, renewable, with plastic universal joints. Depending on the head rail's pitch, slope hooks are used of length 26, 43, 68 or 93 mm.																		
Slatted blind:	See MHZ collection, 127 or 89 mm wide, slats made of woven fabric, plastic or aluminium. Information regarding special properties: For suitability for computer workstations, fire resistance etc., see collection, textile notes.																		
Slat termination:	<table border="1"> <thead> <tr> <th></th> <th>Textile slats</th> <th>Plastic slats</th> <th>Aluminium slats</th> </tr> </thead> <tbody> <tr> <td>Standard items included</td> <td>- weighting plate with plastic slat chain</td> <td>- free-hanging, not connected</td> <td>- connected in centre by a metal slat chain</td> </tr> <tr> <td>on request</td> <td>- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)</td> <td></td> <td>- free-hanging, not connected</td> </tr> </tbody> </table>		Textile slats	Plastic slats	Aluminium slats	Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain	on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected						
	Textile slats	Plastic slats	Aluminium slats																
Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain																
on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected																
Installation:	Visible mounting clip For fitting safety tensioner see page 95.																		
Accessories:	Safety tensioner for cord. Not included: Wall bracket, special mounting clip.																		
Child safety:	Please see the note on page 95.																		

Specifications


# Classic vertically curved blinds

Model **05-7232** (127 mm) and model **05-7285** (89 mm)


## Technical information

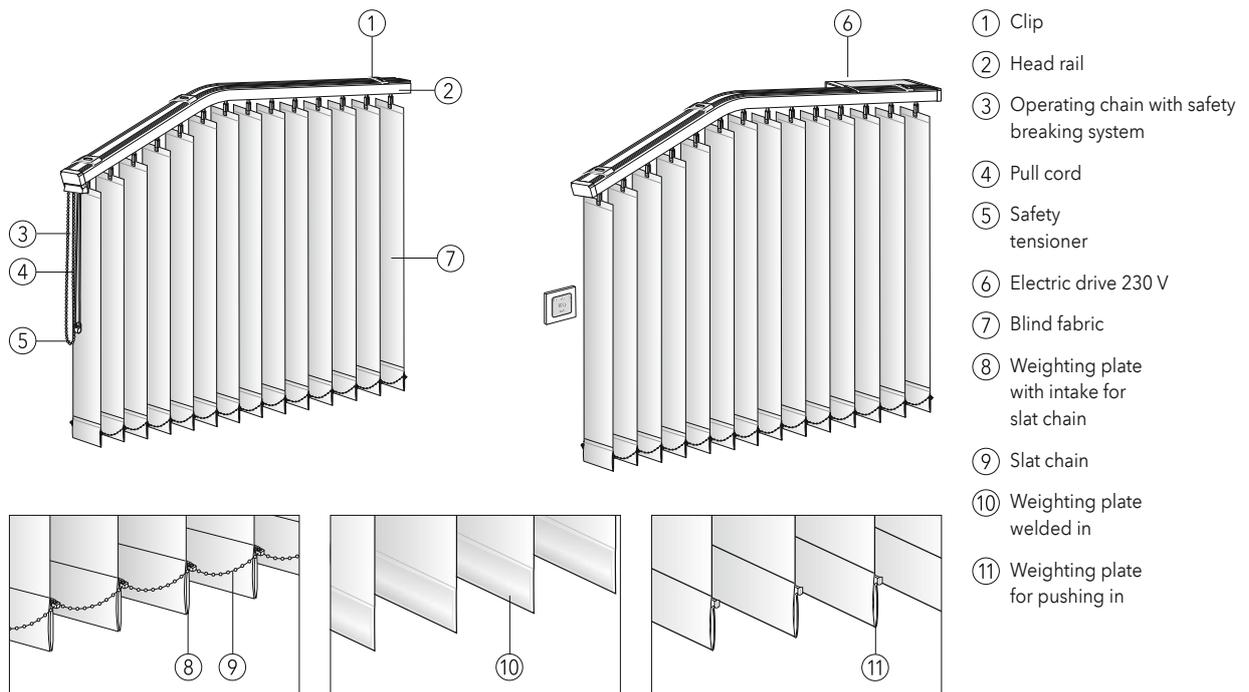

## Technical data (Scale 1:2)

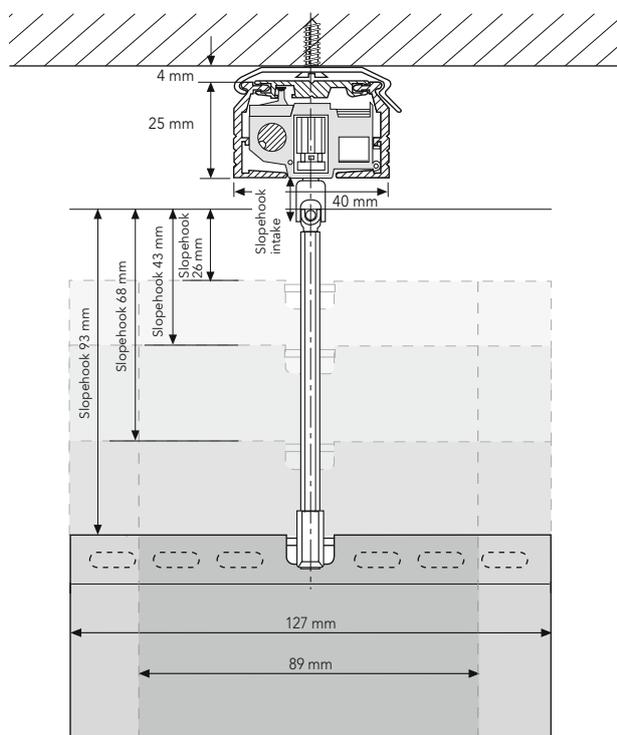

## Variants

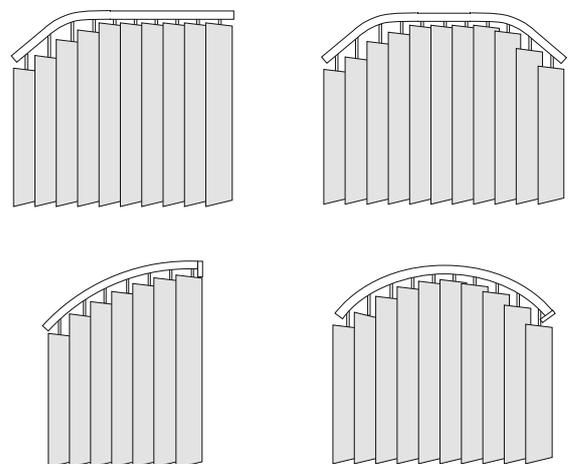

# Classic vertically curved blinds

Model **05-7232** (127 mm) and model **05-7285** (89 mm)

## Specifications


Model:	<b>05-7232</b> 127 mm (minimum curve radius 50 cm) <b>05-7285</b> 89 mm (minimum curve radius 50 cm)																			
Operation options:	- Cord / operating chain - Electric drive 230 V - RTS electric radio drive 230 V																			
Description:	Vertically curved vertical blinds with vertical slats in widths of 127 or 89 mm. Light regulated by turning the slats, blind opened and closed by sliding the slats. Operation optionally on left or right. Blind bundles in 1 part or multi-part (centrally) at the highest point of the blind unit.																			
Operation:	Cord/chain: Opening and closing of the blind by pull cord, turning of the slats by transparent plastic chain with safety breaking system (included as standard) On request: transparent operation chain without safety breaking system, with safety tensioner Metal operating chain with safety tensioner (surcharge applies) Electric drive 230 V: Opening and closing of the blind and turning of the slats (only with blind completely closed) by electric drive 230 V (the electric drive must be positioned on the side with the greater height, for which a straight distance of at least 400 mm is needed). Various control options, with relevant actuators suitable for Bus systems.																			
Dimensions:	<table border="1"> <thead> <tr> <th rowspan="2">Operation / Function</th> <th colspan="4">Unit sizes</th> </tr> <tr> <th>Min. width</th> <th>Max. width</th> <th>Max. height</th> <th>Max. blind fabric weight (angle-dependent)</th> </tr> </thead> <tbody> <tr> <td>Cord/chain</td> <td>20 cm and above</td> <td>up to 560 cm</td> <td>350 cm</td> <td>5-20 kg</td> </tr> <tr> <td>Electric drive 230 V / RTS electric radio drive 230 V</td> <td>40 cm and above</td> <td>up to 560 cm</td> <td>350 cm</td> <td>5-22 kg</td> </tr> </tbody> </table>	Operation / Function	Unit sizes				Min. width	Max. width	Max. height	Max. blind fabric weight (angle-dependent)	Cord/chain	20 cm and above	up to 560 cm	350 cm	5-20 kg	Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	up to 560 cm	350 cm	5-22 kg
Operation / Function	Unit sizes																			
	Min. width	Max. width	Max. height	Max. blind fabric weight (angle-dependent)																
Cord/chain	20 cm and above	up to 560 cm	350 cm	5-20 kg																
Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	up to 560 cm	350 cm	5-22 kg																
Head rail:	Made of extruded aluminium (AlMgSi 0.5 F22), width 40 mm, height 25 mm. Standard colours: <b>100</b> silver anodised E6/EV1 <b>385</b> window grey matt textured RAL 7040 <b>171</b> white RAL 9016 <b>650</b> anthracite, similar to DB 703 <b>172</b> white matt textured RAL 9016 <b>671</b> black matt textured RAL 9005 RAL colours on request																			
Turning rod:	Made of segments and highly flexible spring rod Ø 6 mm, Stabilization by stationary rod supports																			
Slat travellers:	Made of wear-resistant plastic with prelubricated castors, gear for 180° slat tilting, safety clutch for even slat alignment and to prevent any over-rotation of the gears. Individually made stainless steel spacers for even overlapping of slats.																			
Slat hook:	Made of transparent plastic, renewable. Depending on the pitch of the head rail, slope hooks with plastic universal joints in lengths of 26 mm, 43 mm, 68 mm and 93 mm are used.																			
Slatted blind:	See MHZ collection, 127 or 89 mm wide, slats made of woven fabric, plastic or aluminium. Information regarding special properties: For suitability for computer workstations, fire resistance etc., see collection, textile notes.																			
Slat termination:	<table border="1"> <thead> <tr> <th></th> <th>Textile slats</th> <th>Plastic slats</th> <th>Aluminium slats</th> </tr> </thead> <tbody> <tr> <td>Standard items included</td> <td>- weighting plate with plastic slat chain</td> <td>- free-hanging, not connected</td> <td>- connected in centre by a metal slat chain</td> </tr> <tr> <td>on request</td> <td>- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)</td> <td></td> <td>- free-hanging, not connected</td> </tr> </tbody> </table>		Textile slats	Plastic slats	Aluminium slats	Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain	on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected							
	Textile slats	Plastic slats	Aluminium slats																	
Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain																	
on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in with no slat chain - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected																	
Installation:	Visible mounting clip For fitting safety tensioner see page 95.																			
Accessories:	Safety tensioner for cord. Not included: Wall bracket, special mounting clip.																			
Child safety:	Please see the note on page 95.																			

Specifica-  
tions


# Classic horizontally curved blinds

Model **05-7234** (127 mm), model **05-7297** (89 mm) and model **05-7029** (250 mm)


## Technical information

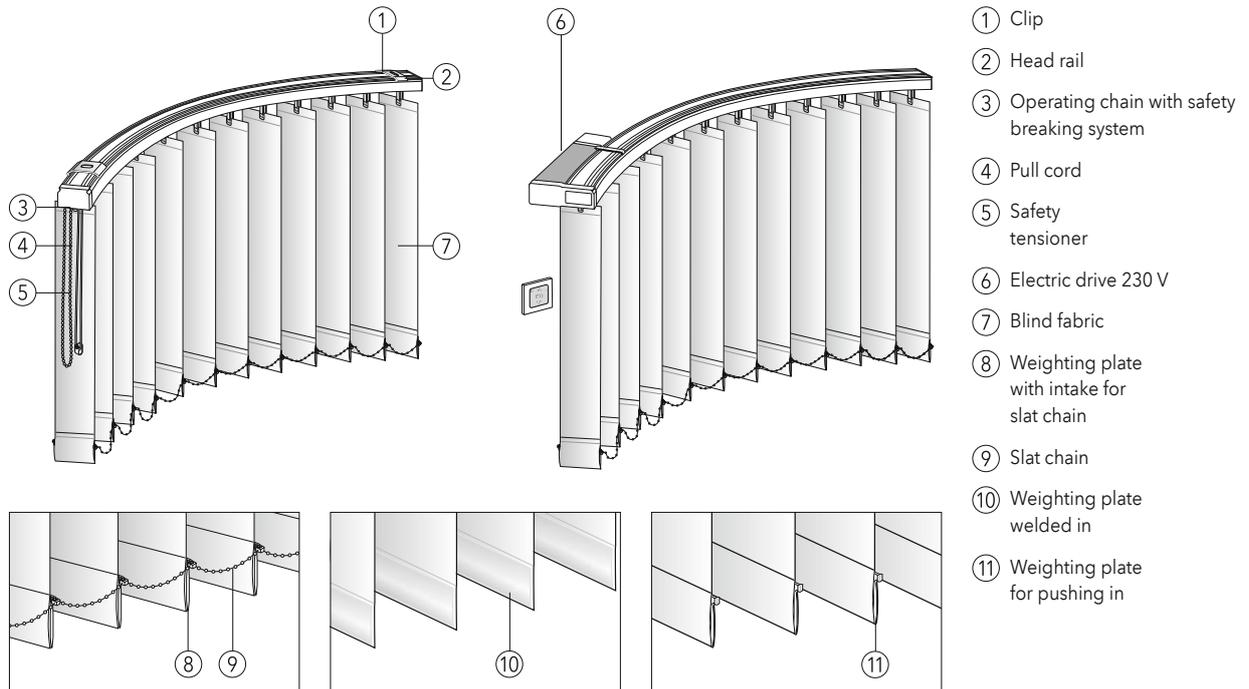

## Technical data (Scale 1:2)

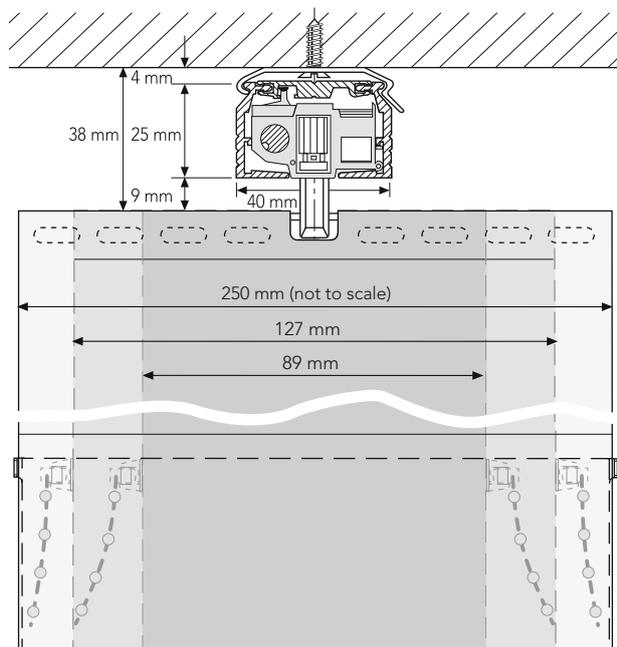

## Variants

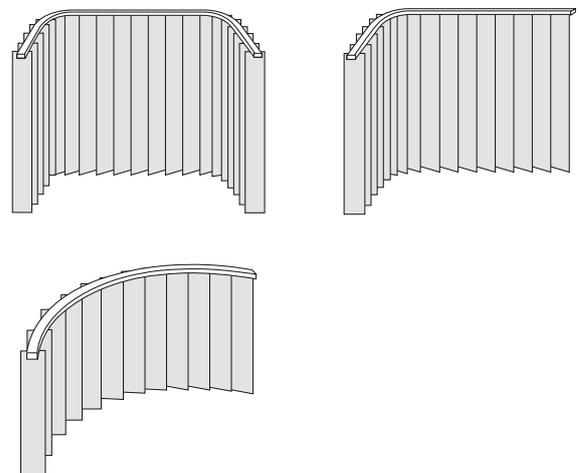

# Classic horizontally curved blinds

Model **05-7234** (127 mm), model **05-7297** (89 mm) and model **05-7029** (250 mm)

## Specifications


Model:	<b>05-7234</b> 127 mm (Minimum curve radius 90 cm) <b>05-7297</b> 89 mm (Minimum curve radius 65 cm) <b>05-7029</b> 250 mm (Minimum curve radius 90 cm)																			
Operation options:	- Cord / operating chain - Electric drive 230 V - RTS electric radio drive 230 V																			
Description:	Horizontally curved vertical blinds with vertical slats in widths of 127, 89 or 250 mm. Light regulation by turning the slats and by opening and closing the blind by moving the slats. Operation optionally on left or right. Blind bundles 1-piece left or right, several pieces left and right or central.																			
Operation:	Cord/chain: Opening and closing of the blind by pull cord, turning of the slats by transparent plastic chain with safety breaking system (included as standard) On request: transparent operating chain without safety breaking system, with safety tensioner Metal operating chain with safety tensioner (surcharge applies) Electric drive 230 V: Blind opened and closed and slats turned (only with blind completely closed) by means of 230V electric drive. Various control options, with relevant actuators suitable for Bus systems.																			
Dimensions:	<table border="1"> <thead> <tr> <th rowspan="2">Operation / Function</th> <th colspan="4">Unit sizes</th> </tr> <tr> <th>Min. width</th> <th>Max. width</th> <th>Max. height</th> <th>Max. blind fabric weight</th> </tr> </thead> <tbody> <tr> <td>Cord/chain</td> <td>20 cm and above</td> <td>up to 560 cm</td> <td>350 cm</td> <td>20 kg</td> </tr> <tr> <td>Electric drive 230 V / RTS electric radio drive 230 V</td> <td>40 cm and above</td> <td>up to 560 cm</td> <td>350 cm</td> <td>22 kg</td> </tr> </tbody> </table>	Operation / Function	Unit sizes				Min. width	Max. width	Max. height	Max. blind fabric weight	Cord/chain	20 cm and above	up to 560 cm	350 cm	20 kg	Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	up to 560 cm	350 cm	22 kg
Operation / Function	Unit sizes																			
	Min. width	Max. width	Max. height	Max. blind fabric weight																
Cord/chain	20 cm and above	up to 560 cm	350 cm	20 kg																
Electric drive 230 V / RTS electric radio drive 230 V	40 cm and above	up to 560 cm	350 cm	22 kg																
Head rail:	Made of extruded aluminium (AlMgSi 0.5 F22), width 40 mm, height 25 mm. Standard colours: <b>100</b> silver anodised E6/EV1 <b>385</b> window grey matt textured RAL 7040 <b>171</b> white RAL 9016 <b>650</b> anthracite, similar to DB 703 <b>172</b> white matt textured RAL 9016 <b>671</b> black matt textured RAL 9005 RAL colours on request																			
Turning rod:	Made of segments and highly flexible spring rod Ø 6 mm, Stabilization by stationary rod supports																			
Slat travellers:	Made of wear-resistant plastic with prelubricated castors, gear for 180° slat tilting, safety clutch for even slat alignment and to prevent any over-rotation of the gears. Individually made stainless steel spacers for even overlapping of slats. 250 mm slat: double the number of slat travellers for increased functional reliability.																			
Slat hook:	Made of transparent plastic, renewable																			
Slatted blind:	See MHZ collection, 127, 89 or 250 mm wide, slats made of woven fabric, plastic or aluminium. Information regarding special properties: For suitability for computer workstations, fire resistance etc., see collection, textile notes.																			
Slat termination:	<table border="1"> <thead> <tr> <th></th> <th>Textile slats</th> <th>Plastic slats</th> <th>Aluminium slats</th> </tr> </thead> <tbody> <tr> <td>Standard items included</td> <td>- weighting plate with plastic slat chain</td> <td>- free-hanging, not connected</td> <td>- connected in centre by a metal slat chain</td> </tr> <tr> <td>on request</td> <td>- weighting plate, welded in (no surcharge) - weighting plate for pushing in, no slat chain (standard with type 05-7025)<sup>1</sup> - weighting plate with metal slat chain (surcharge applies)</td> <td></td> <td>- free-hanging, not connected</td> </tr> </tbody> </table>		Textile slats	Plastic slats	Aluminium slats	Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain	on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in, no slat chain (standard with type 05-7025) <sup>1</sup> - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected							
	Textile slats	Plastic slats	Aluminium slats																	
Standard items included	- weighting plate with plastic slat chain	- free-hanging, not connected	- connected in centre by a metal slat chain																	
on request	- weighting plate, welded in (no surcharge) - weighting plate for pushing in, no slat chain (standard with type 05-7025) <sup>1</sup> - weighting plate with metal slat chain (surcharge applies)		- free-hanging, not connected																	
Installation:	Visible mounting clip For fitting safety tensioner see page 95.																			
Accessories:	Safety tensioner for cord. Not included: Wall bracket, special mounting clip.																			
Child safety:	Please see the note on page 95.																			

Specifica-  
tions


# Classic vertically taut blinds

Model **05-8127** (127 mm), model **05-8164** (89 mm) and model **05-7027** (250 mm)

## Technical information

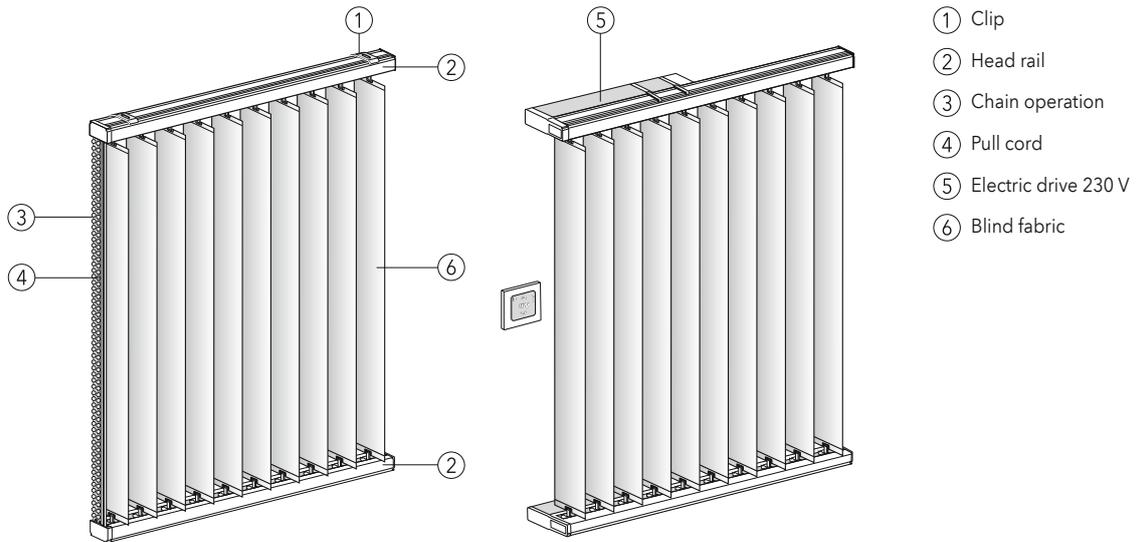


## Technical data (Scale 1:2)

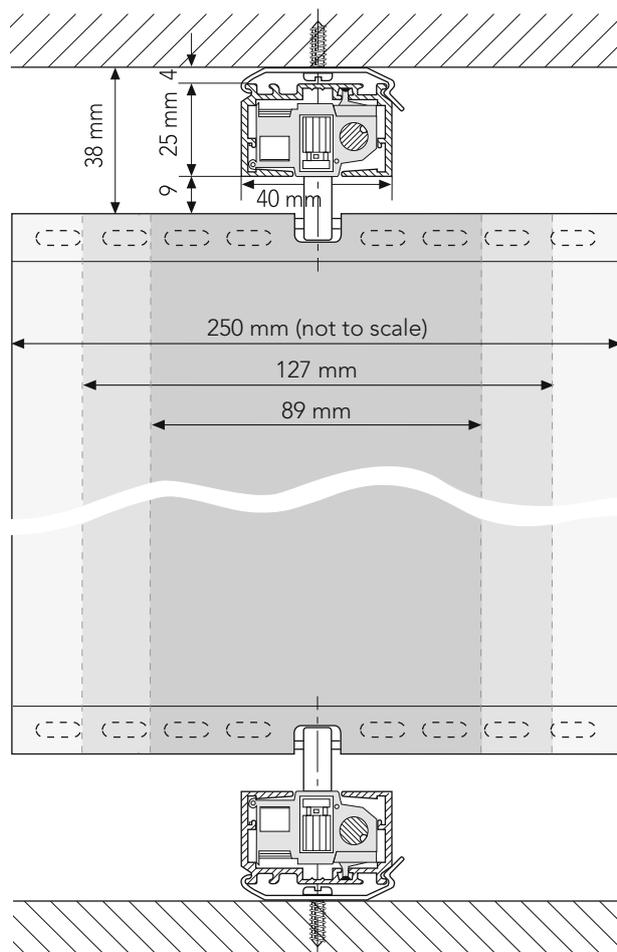


## Non-linked blinds - Parking positions

2-piece blind, bundles left and right

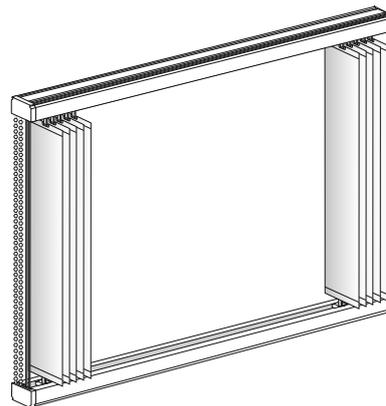

2-piece blind, bundles central

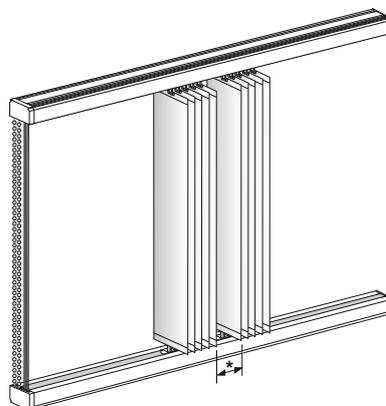

\* Light gap for slats with  
 127 mm: 11 cm  
 89 mm: 7.5 cm  
 250 mm: 22 cm

# Classic vertically taut blinds

Model **05-8127** (127 mm), model **05-8164** (89 mm) and model **05-7027** (250 mm)

## Specifications


Model:	<b>05-8127</b> 127 mm <b>05-8164</b> 89 mm <b>05-7027</b> 250 mm																			
Operation options:	- Cord / operating chain - Electric drive 230 V - RTS electric radio drive 230 V																			
Description:	Vertically taut vertical blinds with slats in widths of 127, 89 or 250 mm. Light regulation by turning the slats and by opening and closing the blind by moving the slats. Operation optionally on left or right. Blind bundles optionally left or right, one part or multi-part.																			
Operation:	Cord/chain: Opening and closing of the blind by pull cord, turning of the slats by transparent plastic chain. Electric drive 230 V: Blind opened and closed and slats turned (only with blind completely closed) by means of 230V electric drive. Various control options, with relevant actuators suitable for Bus systems.																			
Dimensions:	<table border="1"> <thead> <tr> <th rowspan="2">Operation / Function</th> <th colspan="4">Unit sizes</th> </tr> <tr> <th>Min. width</th> <th>Max. width</th> <th>Max. height</th> <th>Max. blind fabric weight</th> </tr> </thead> <tbody> <tr> <td>Cord/chain</td> <td>20 cm and above</td> <td>up to 450 cm</td> <td>350 cm</td> <td>10 kg</td> </tr> <tr> <td>Electric drive 230 V / RTS electric radio drive 230 V</td> <td>50 cm and above</td> <td>up to 450 cm</td> <td>350 cm</td> <td>10 kg</td> </tr> </tbody> </table>	Operation / Function	Unit sizes				Min. width	Max. width	Max. height	Max. blind fabric weight	Cord/chain	20 cm and above	up to 450 cm	350 cm	10 kg	Electric drive 230 V / RTS electric radio drive 230 V	50 cm and above	up to 450 cm	350 cm	10 kg
Operation / Function	Unit sizes																			
	Min. width	Max. width	Max. height	Max. blind fabric weight																
Cord/chain	20 cm and above	up to 450 cm	350 cm	10 kg																
Electric drive 230 V / RTS electric radio drive 230 V	50 cm and above	up to 450 cm	350 cm	10 kg																
Head and bottom rail:	Made of extruded aluminium (AlMgSi 0.5 F22), width 40 mm, height 25 mm. Standard colours: <b>100</b> silver anodised E6/EV1 <b>385</b> window grey matt textured RAL 7040 <b>171</b> white RAL 9016 <b>650</b> anthracite, similar to DB 703 <b>172</b> white matt textured RAL 9016 <b>671</b> black matt textured RAL 9005 RAL colours on request																			
Turning rod:	Extruded aluminium (AlMgSi 0.5 F25), torsion-proof slotted rod Ø 6 mm, stabilization by stationary rod supports																			
Slat travellers:	Made of wear-resistant plastic with prelubricated castors, gear for 180° slat tilting, safety clutch for even slat alignment and to prevent any over-rotation of the gears. Individually made stainless steel spacers for even overlapping of slats. 250 mm slat: double the number of slat travellers for increased functional reliability.																			
Slat hook:	Made of wear-resistant plastic with integrated steel spring																			
Slatted blind:	See MHZ collection, 127, 89 or 250 mm wide, slats made of woven fabric. Slats are taut between head and bottom rail. Information regarding special properties: For suitability for computer workstations, fire resistance etc., see collection, textile notes.																			
Installation:	Visible mounting clip																			
Accessories:	Not included: Wall bracket																			

Specifica-  
tions

# Classic horizontally taut blinds


Model **05-8827** (127 mm) and model **05-8166** (89 mm)

## Technical information

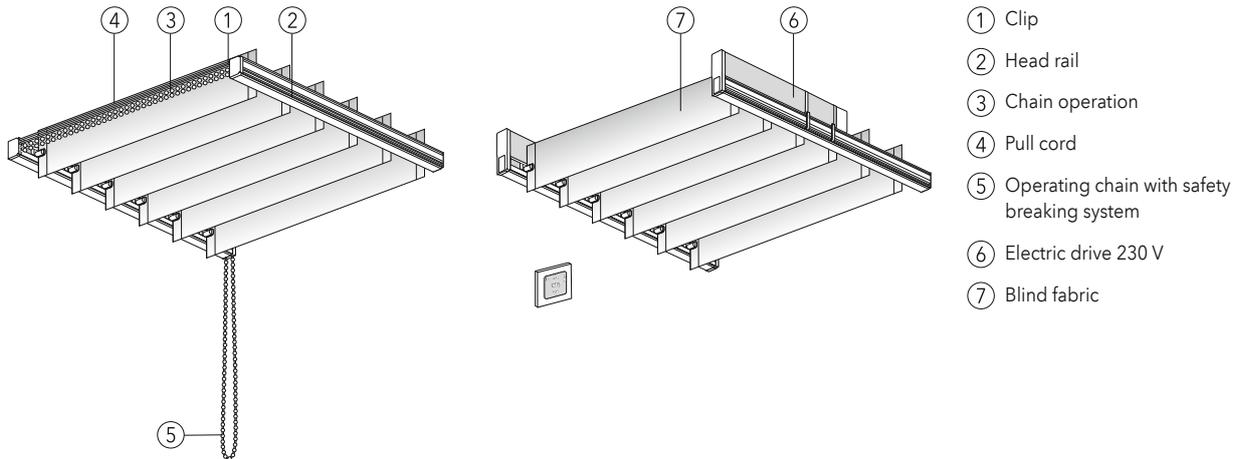


Opening and closing of the blind via pull cord only possible at top of blind.

## Technical data (Scale 1:2)

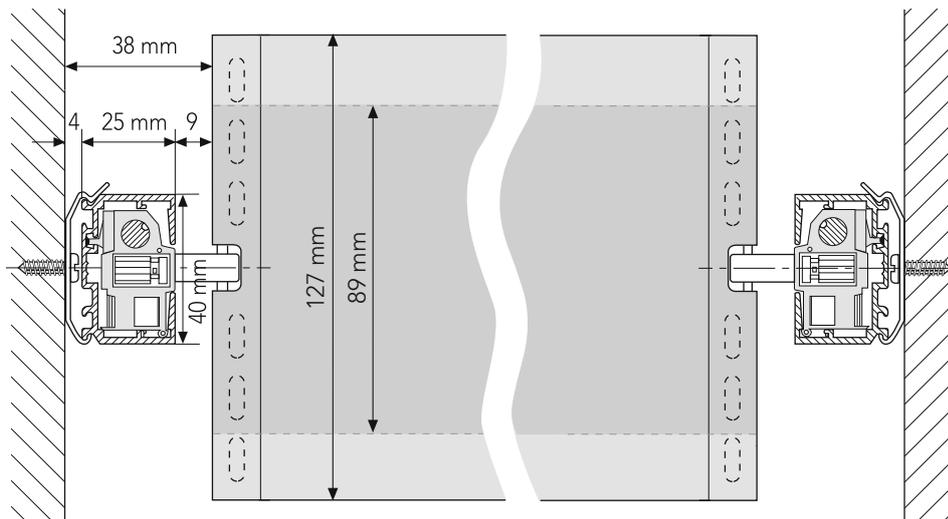


## Non-linked blinds - Parking positions

2-piece blind, bundles left and right

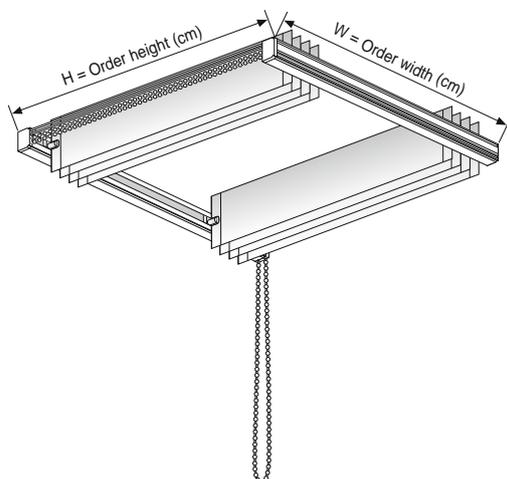

2-piece blind, bundles central

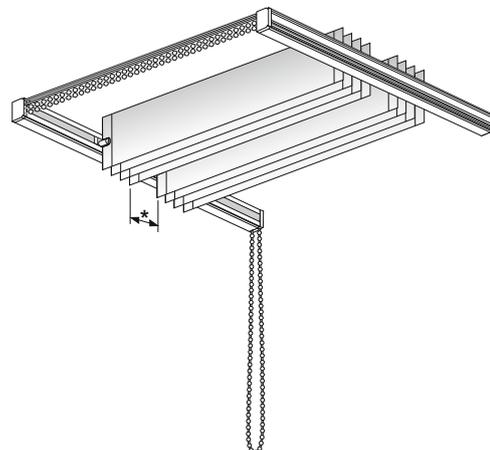

\* Light gap for slats with

127 mm: 11 cm  
89 mm: 7.5 cm

# Classic horizontally taut blinds

Model **05-8827** (127 mm) and model **05-8166** (89 mm)

## Specifications

Model:	<b>05-8827</b> 127 mm <b>05-8166</b> 89 mm
Operation options:	- Cord / operating chain - Electric drive 230 V - RTS electric radio drive 230 V
Description:	Horizontally taut vertical blinds with slats in widths of 127 or 89 mm. Light regulation by turning the slats and by opening and closing the blind by moving the slats. Operation optionally on left or right. Blind bundles optionally left or right, one part or multi-part.
Operation:	Cord/chain: Opening and closing of the blind by pull cord (possible only at top of blind unit), turning of the slats by transparent plastic chain with safety breaking system (included as standard) On request: transparent operating chain without safety breaking system, with safety tensioner Metal operating chain with safety tensioner (surcharge applies) Electric drive 230 V: Blind opened and closed and slats turned (only with blind completely closed) by means of 230V electric drive. Various control options, with relevant actuators suitable for Bus systems.
Dimensions:	<b>Operation / Function</b>
	<b>Unit sizes</b>
	<b>Min. width      Max. width      Max. height      Max. blind fabric weight</b>
	Cord/chain      20 cm and above      up to 400 cm      200 cm      4 kg
	Electric drive 230 V / RTS electric radio drive 230 V      50 cm and above      up to 400 cm      200 cm      4 kg
	<b>Fabric weight [g/m<sup>2</sup>]</b> up to 130 g      up to 140 g      up to 170 g      up to 250 g      up to 350 g      up to 450 g
	Max. height with slat width 89 mm.      200 cm      200 cm      180 cm      160 cm      140 cm      120 cm
	Max. height with slat width 127 mm.      200 cm      180 cm      160 cm      140 cm      120 cm      -
Head and bottom rail:	Made of extruded aluminium (AlMgSi 0.5 F22), width 40 mm, height 25 mm. Standard colours: <b>100</b> silver anodised E6/EV1 <b>385</b> window grey matt textured RAL 7040 <b>171</b> white RAL 9016 <b>650</b> anthracite, similar to DB 703 <b>172</b> white matt textured RAL 9016 <b>671</b> black matt textured RAL 9005 RAL colours on request
Turning rod:	Extruded aluminium (AlMgSi 0.5 F25), torsion-proof slotted rod Ø 6 mm, stabilization by stationary rod supports
Slat travellers:	Made of wear-resistant plastic with prelubricated castors, gear for 180° slat tilting, safety clutch for even slat alignment and to prevent any over-rotation of the gears. Individually made stainless steel spacers for even overlapping of slats.
Slat hook:	Made of wear-resistant plastic with integrated steel spring
Slatted blind:	See MHZ collection, 127 or 89 mm wide, slats made of woven fabric. Slats are taut between head and bottom rail. Information regarding special properties: For suitability for computer workstations, fire resistance etc., see collection, textile notes.
Installation:	Visible mounting clip For fitting safety tensioner see page 95.
Accessories:	Not included: Wall bracket
Child safety:	Please see the note on page 95.

Specifica-  
tions